


## VP4 Bottom Loading Pump Curve

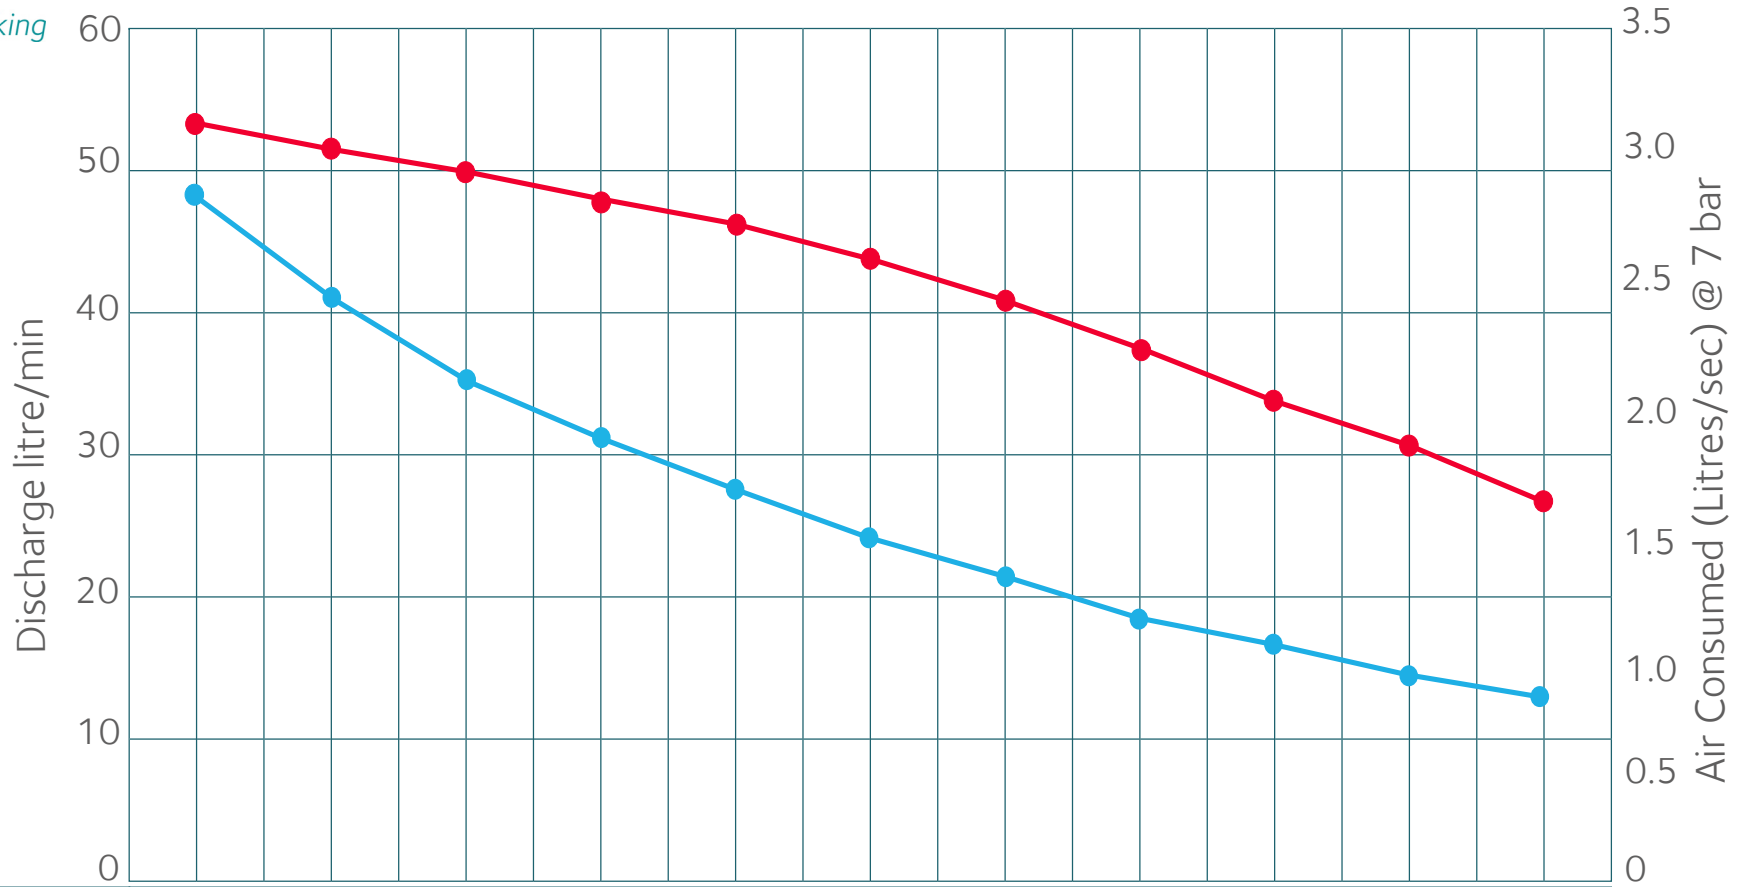

|                             |      |      |      |      |      |      |      |      |      |      |      |
|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|
| Well Depth (m)              | 10   | 15   | 20   | 25   | 30   | 35   | 40   | 45   | 50   | 55   | 60   |
| Discharge LPM               | 48.0 | 41.0 | 36.0 | 31.5 | 28.0 | 24.7 | 21.5 | 18.9 | 16.7 | 14.8 | 13.0 |
| Total Air (L/S) Requirement | 3.1  | 3.0  | 2.9  | 2.8  | 2.7  | 2.6  | 2.5  | 2.3  | 2.1  | 1.9  | 1.7  |

— Discharge LPM

— Total Air (L/S) Requirement

Unit 39, Wirral Business Centre, Dock Road, Birkenhead, Merseyside, United Kingdom, CH41 1JW

Tel: 0151 639 8666

email [info@viridiansystems.com](mailto:info@viridiansystems.com)

[www.viridiansystems.com](http://www.viridiansystems.com)